

A new **longest** model joins the NEL series

Elevating Tripod

NEL2-60L

max.
2.5m




NEL2-60SL NEL2-60L
Graduated type



NEL2-18SL NEL2-33SL
Dust-proof Bellows type

Check point -60L/60SL- Pole with graduation

Millimeter graduations enable precise height adjustments.
With a 604mm elevation stroke, it offers a longer range than the dust-proof models.
Now available: NEL2-60L, with extended legs (+600mm when fully extended) compared to the NEL2-60SL.

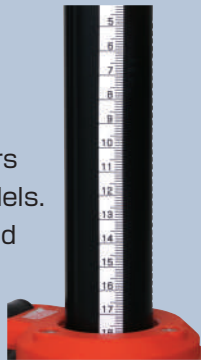

Check point -33SL/18SL- Dust-proof with bellows

Bellows prevent dust and sand from entering, ensuring smooth operation.
Ideal for both indoor and outdoor use.
Available in two sizes:
NEL2-33SL – Standard model
NEL2-18SL – Compact, portable model



Common Features

Tripod head



Circular level
100°/2mm
Shifting range
20mm



Head cover



Level adjustable

Leg part



Safety chain

Inside the pole



Black anodized finish
to reduce laser reflection

Specifications

	NEL2-60SL	NEL2-60L	NEL2-18SL	NEL2-33SL
Elevating range	604mm	604mm	185mm	335mm
Full extended	1,901mm	2,501mm	1,196mm	1,746mm
Full closed	927mm	1,227mm	840mm	1,040mm
Tripod head size	φ 148mm / 44mm			
Screw	5/8 inch			
Weight	6.1kg	7.0kg	5.7kg	6.3kg
Accessory	Tripod head cover			

Code No.	Product Name	Model
225026	Graduated type / 927~1,901mm	NEL2-60SL
226020	Graduated type / 1,227~2,501mm	NEL2-60L
225028	Bellows type / 840~1,196mm	NEL2-18SL
225027	Bellows type / 1,040~1,746mm	NEL2-33SL

Myzox Co., Ltd.

401 Yamagoe, Nagakute, Aichi 480-1111 Japan
TEL : +81-561-64-2210 FAX : +81-561-63-7770

www.myzoxjapan.com

Your Local Authorized Myzox Dealer is :