


STAFF

4

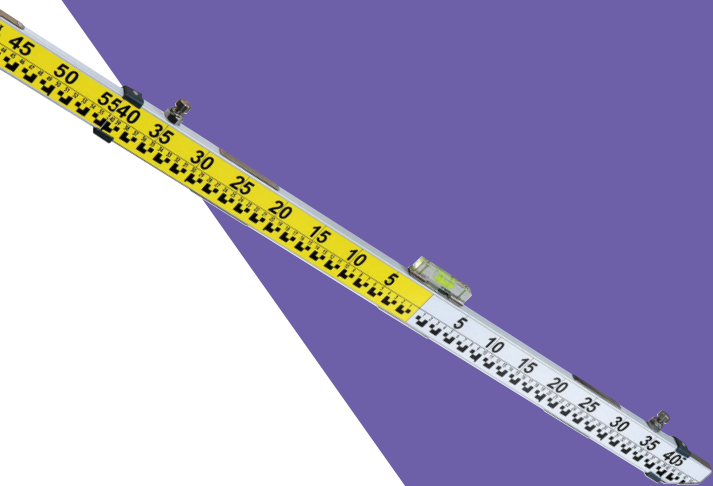

Aluminium Staff **P.070**

Prism Staff / Staff Prism **P.075**

Drain Staff / Scale Staff **P.076**

Fiberglass Staff **P.077**

Centering Staff / Staff Accessory **P.078**

Photo Record Accessory **P.080**

TRIPOD 1

PRISM 2

POLE 3

STAFF 4

GNSS ACCESSORY 5

LASER SCANNING 6

SURVEYING / LASER INSTRUMENT 7

SURVEYING ACCESSORY 8

MEASURING TOOL 9


TESTING INSTRUMENT 10

Myzox's Staff


Choices of Staff

Graduation

Front graduation



Metric W
5mm / 10mm
White



Metric YW
5mm / 10mm
Yellow / White




E face



EB face




TRI-E




TRI-M

Back graduation



0 UP
0mm to up
from the bottom



Inside
Measuring
inside dimension





Photo
For photo record

How to Read


Metric W / Metric YW / TRI-M

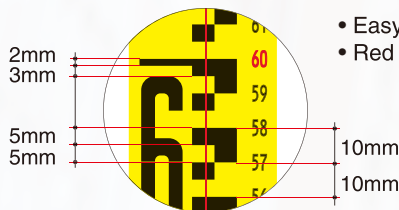

- Easy to see by big letter
- Red letter at every 5cm

TRI-E / TRI-M • TRI-MARK at every 1cm

High-quality staff with TRI-MARK graduation makes you get more accurate measuring data.




Compatible model

MST series (Ref. Page 070)
ALX series (Ref. Page 072)


Coating

Super Top Coating (S.T.C)


By adding an additional clear coating to the conventional coating, the durability against scratches and impacts is significantly enhanced.



Compatible model
MST series



Compatible model
ALG, ALM, SUM, SUN,
STN, ALS, SWG series



Compatible model
Other models

Button

Square button



MG-02A
for MST, ALG, ALX, SUN, STN, RFC, SWG series

MG-04

Staves with MG-02A and Button Protection Label MG-02PS

- Aluminium Staff Quality type (MST series)
- Prism Staff (RFC series)
- Drain Staff (SWG-54)
- ALG-25Y

Staves with MG-04

- Aluminium Staff Standard type (ALG series) *except for ALG-25Y
- Aluminium Staff Slim type (SUN series)
- Aluminium Staff Less Section type (STN-54)

Button protection label

MG-02PS



Able to use only
with MG-02A



Round button



MG-01
for ALM, SUM, ALS series



MG-03
for MTR series



Main lineup of aluminium staves



MST series
Flagship model
3m / 5m

P.070



ALG series
Standard model
2m / 3m / 5m

P.071



ALM series
Heavy duty
5m

P.072




ALX series
Good value
5m

P.072



AGX series
Economical
3m / 5m

P.072



SUM series
Wide body
3m / 5m

P.073



SUN series
Lightweight
3m / 5m

P.073



STN-54
Less section
5m

P.074



ALS-74
Longest body
7m

P.074



RFC series
2 in 1 prism staff
3m / 4m / 5m

P.075



MTR series
Simple staff
2m / 3m

P.076



GFS / GFX series
Fiberglass body
3m / 5m / 7m / 10m

P.077

TRIPOD 1

PRISM 2

POLE 3

STAFF 4

GNSS ACCESSORY 5

LASER SCANNING 6

SURVEYING / LASER INSTRUMENT 7

SURVEYING ACCESSORY 8

MEASURING TOOL 9

TESTING INSTRUMENT 10

Aluminium Staff Quality type

MST series


ADVANCED IDEA

MST series has an advanced idea on the graduation, Tri-Mark.

✓ CHECK



ADVANCED IDEA TO BRING ACCURACY

High-quality staff with Tri-mark graduation makes you get more accurate measuring data.




*The staff with TRI-E is ALX series. (Ref. Page 072)

How to Read



✓ CHECK

S.T.C. COATING

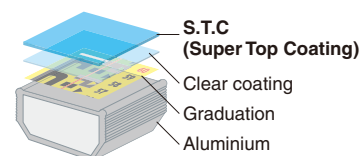

✓ CHECK

STAINLESS BOTTOM




SA-60
Circular level 60' / 2mm
(Option)
Ref. Page 079




MG-02A
Staff button
Ref. Page 078




MG-02PS
Button protection label
Ref. Page 079




Dimensions
5m / 5sec.
(MST-55)



Dimensions
5m / 4sec.
(MST-54)



Dimensions
5m / 3sec.
(MST-53)



Dimensions
3m / 3sec.
(MST-33)

► SPECIFICATIONS

Model	MST-55	MST-54	MST-53	MST-33
Graduation (front)	Metric YW	Metric YW	Metric YW	Metric YW
Graduation (back)	Photo / Inside	Photo	Photo	Photo
Section	5m / 5sec.	5m / 4sec.	5m / 3sec.	3m / 3sec.
Full closed	1,245mm	1,445mm	1,836mm	1,146mm
Weight	1.70kg	1.73kg	1.56kg	0.94kg

► STANDARD ACCESSORIES

- Button protection label MG-02PS

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Aluminium Staff 5m/5sec.	MST-55	8	8	217630	TW
Aluminium Staff 5m/4sec.	MST-54	8	8	217633	TW
Aluminium Staff 5m/3sec.	MST-53	8	8	217631	TW
Aluminium Staff 3m/3sec.	MST-33	8	8	217632	TW



Product Link




Product Movie

Aluminium Staff Standard type

ALG series

STANDARD

ALG series is world standard type of staff.

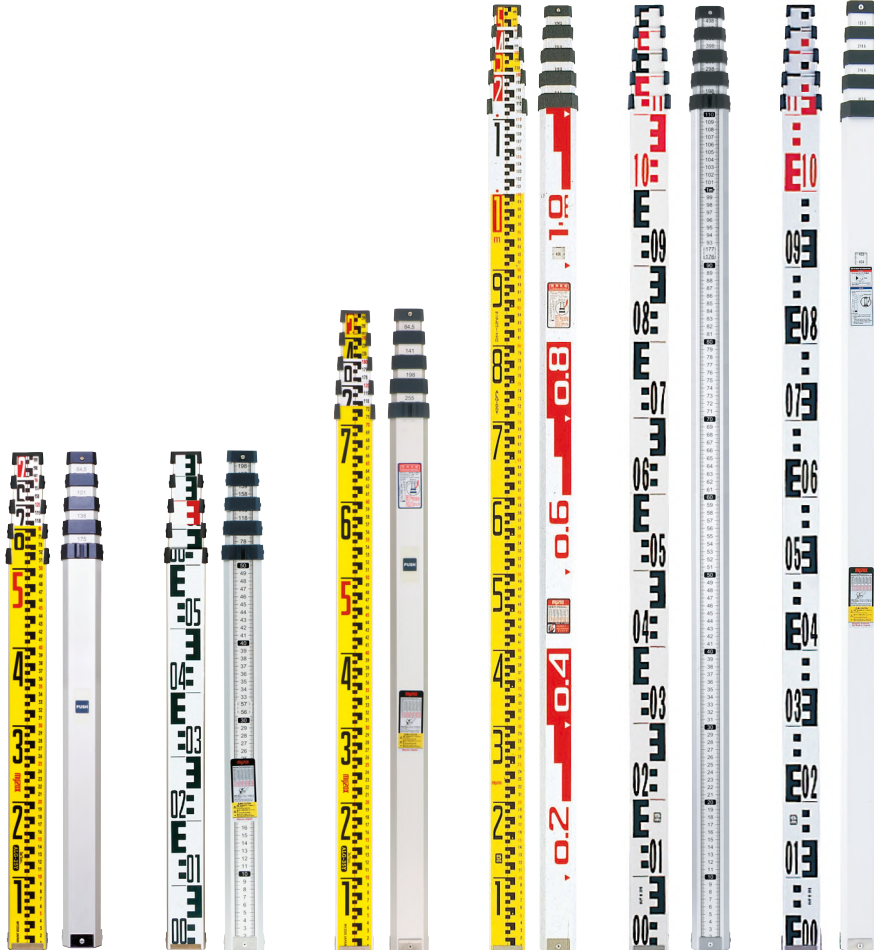

ALG-25Y

ALG-25E2

ALG-35Y

ALG-55Y

ALG-55E2

ALG-55EB

SPECIFICATIONS

Model	ALG-55Y	ALG-55E2	ALG-55EB
Graduation (front)	Metric YW	E	EB
Graduation (back)	Photo / Inside	0 UP	Inside
Section	5m / 5sec.	5m / 5sec.	5m / 5sec.
Full closed	1,245mm	1,245mm	1,245mm
Weight	1.70kg	1.70kg	1.70kg

Model	ALG-35Y	ALG-25Y	ALG-25E2
Graduation (front)	Metric YW	Metric YW	E
Graduation (back)	Inside	Inside	0 UP
Section	3m / 5sec.	2m / 5sec.	2m / 5sec.
Full closed	845mm	645mm	645mm
Weight	1.20kg	0.9kg	0.9kg

STANDARD ACCESSORIES

- Button protection label MG-02PS (ALG-25Y / 35Y)

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Aluminium Staff 5m/5sec. Metric YW	ALG-55Y	8	8	011005	TW
Aluminium Staff 5m/5sec. E face	ALG-55E2	10	10	240028	TW
Aluminium Staff 5m/5sec. EB face	ALG-55EB	10	10	091545	TW
Aluminium Staff 3m/5sec. Metric WY	ALG-35Y	10	10	222722	TW
Aluminium Staff 2m/5sec. Metric WY	ALG-25Y	8	8	221495	TW
Aluminium Staff 2m/5sec. E face	ALG-25E2	10	10	222056	TW


CHECK

STANDARD TYPE

World standard staff.
Having many choices such as colors, graduation and lengths and so on.
You can find the best matching one from the line-up.
Myzox is a top share company in Japanese market with ALG series.
Simple product, but there is a reason why Myzox is a top share.


CHECK

HOW TO READ

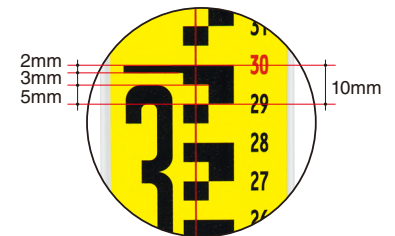

CHECK

STAINLESS BOTTOM




Product Link

Aluminium Staff Heavy-duty type ALM series

HEAVY-DUTY

ALM series is heavy-duty and robust and wide type of staff.

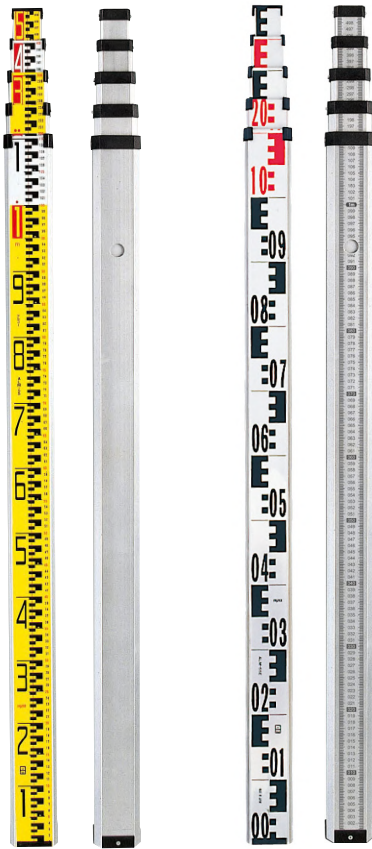

ALM-55


ALM-55E



SB-60
Circular level 60°/2mm
Ref. Page 079



MG-01
Staff button
Ref. Page 078




Dimensions

Aluminium Staff Economical type ALX series / AGX series

GOOD BALANCED

Good balanced economical model.

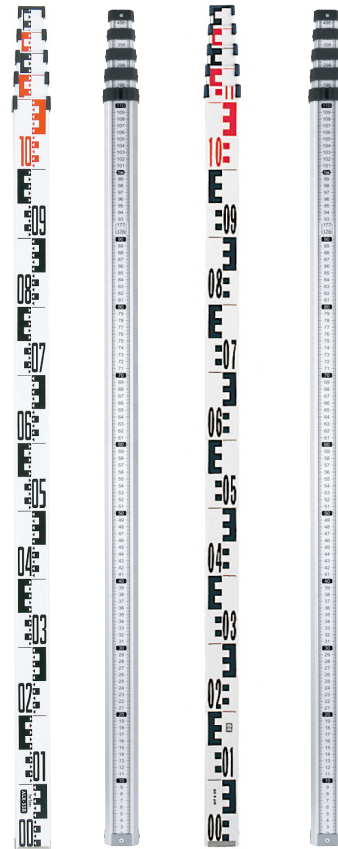

ALX-55E2


AGX-55E2




SA-60
Circular level 60°/2mm
(Option)
Ref. Page 079



MG-02A
Staff button
(Option)
Ref. Page 078



Dimensions
4m / 4sec.



Dimensions
5m / 5sec.

CHECK

HEAVY-DUTY TYPE

Robust type staff with wide size surface.
It is easy to see the graduation from far
and get more accurate measuring data.
Circular level and carrying case comes
with as standard accessories.

Standard type

ALM series

*Reduction by same ratio

SPECIFICATIONS

Model	ALM-55	ALM-55E
Graduation (front)	Metric YW	E
Graduation (back)	-	0 UP
Section	5m / 5sec.	5m / 5sec.
Full closed	1,305mm	1,305mm
Weight	3.00kg	3.00kg

STANDARD ACCESSORIES

- Carrying case
- Circular level SB-60 (60°/2mm)



Product Link

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Aluminium Staff 5m/5sec. Metric YW	ALM-55	5	5	011051	TW
Aluminium Staff 5m/5sec. E face	ALM-55E	5	5	091568	TW

CHECK

2 TYPES OF GRADUATION



ALX series
TRI-E type
Ref. Page 072



AGX series
Regular type

SPECIFICATIONS

Model	ALX-55E2	ALX-55Y2	AGX-55E2
Graduation (front)	TRI-E	Metric YW	E
Graduation (back)	0 UP	0 UP	0 UP
Section	5m / 5sec.	5m / 5sec.	5m / 5sec.
Full closed	1,235mm	1,235mm	1,235mm
Weight	1.50kg	1.50kg	1.50kg

Model	AGX-55MF	AGX-33E2
Graduation (front)	Metric Y	E
Graduation (back)	Inch / Feet	0 UP
Section	5m / 5sec.	3m / 3sec.
Full closed	1,235mm	1,170mm
Weight	1.50kg	1.00kg



Product Link


PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Aluminium Staff 5m/5sec. TRI-E	ALX-55E2	10	10	224265	CN
Aluminium Staff 5m/5sec. Metric YW	ALX-55Y2	10	10	222442	CN
Aluminium Staff 5m/5sec. E face	AGX-55E2	10	10	223488	CN
Aluminium Staff 5m/5sec.	AGX-55MF	10	10	223551	CN
Aluminium Staff 3m/3sec. E face	AGX-33E2	10	10	223489	CN

Aluminium Staff Wide type

SUM series

WIDE, NOT HEAVY

Wide type staff, but not too heavy to carry around.

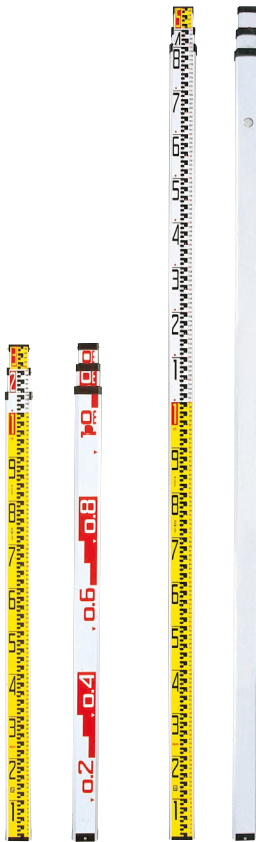

SUM-33


SUM-53



SB-60
Circular level 60°/2mm
(Option)
Ref. Page 079



MG-01
Staff button
Ref. Page 078




Dimensions

Aluminium Staff Slim type

SUN series

THE LIGHTEST TYPE

One of the lightest type in Myzox's line up.

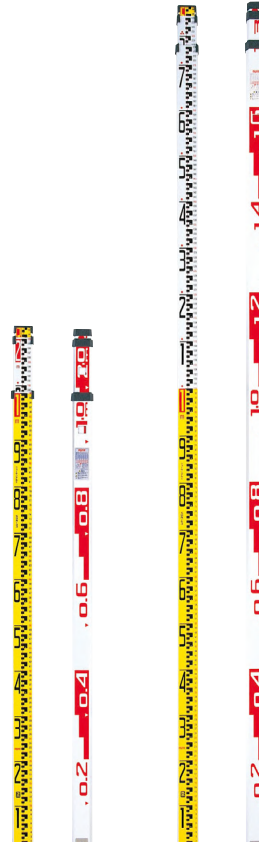

SUN-33


SUN-53



SA-60
Circular level 60°/2mm
(Option)
Ref. Page 079



MG-04
Staff button
Ref. Page 078




Dimensions

✓ CHECK

WIDE, BUT NOT HEAVY

Wide face is easy to see measuring result even long distance.
Furthermore, it is not heavy to carry around.
Less section will give you accurate measuring results.



*Reduction by same ratio

► SPECIFICATIONS

Model	SUM-53	SUM-53E
Graduation (front)	Metric YW	E
Graduation (back)	-	-
Section	5m / 3sec.	5m / 3sec.
Full closed	1,900mm	1,900mm
Weight	2.00kg	2.00kg

Model	SUM-33	SUM-33E
Graduation (front)	Metric YW	E
Graduation (back)	Photo	-
Section	3m / 3sec.	3m / 3sec.
Full closed	1,150mm	1,150mm
Weight	1.20kg	1.20kg




Product Link

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Aluminium Staff 5m/3sec. Metric YW	SUM-53	10	10	011052	TW
Aluminium Staff 5m/3sec. E face	SUM-53E	10	10	091580	TW
Aluminium Staff 3m/3sec. Metric YW	SUM-33	10	10	011053	TW
Aluminium Staff 3m/3sec. E face	SUM-33E	10	10	091597	TW

✓ CHECK

THE LIGHTEST TYPE

One of the lightest type in Myzox's staves line-up.
The weight of 3m x 3sec. type is less than 1kg.
Also, longer type staff, 5m x 3sec. is suitable for a site where has height differences.

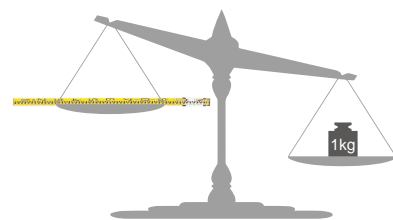

► SPECIFICATIONS

Model	SUN-53	SUN-33
Graduation (front)	Metric YW	Metric YW
Graduation (back)	Photo	Photo
Section	5m / 3sec.	3m / 3sec.
Full closed	1,836mm	1,146mm
Weight	1.56kg	0.94kg



Product Link

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Aluminium Staff 5m/3sec. Metric YW	SUN-53	8	8	011008	TW
Aluminium Staff 3m/3sec. Metric YW	SUN-33	8	8	011009	TW

Aluminium Staff Less Section type STN-54

MIDDLE SIZE

Middle size ; Balanced staff.




STN-54



SA-60
Circular level 60°/2mm
(Option)
Ref. Page 079



MG-04
Staff button
Ref. Page 078



Dimensions


Aluminium Staff Long type ALS-74

LONGEST BODY

ALS-74 has the longest body in Myzox's line up.



ALS-74



Dimensions



SB-60
Circular level 60° / 2mm
(Option)
Ref. Page 079




MG-01
Staff button
Ref. Page 078

CHECK

MIDDLE SIZE

1st section is around 1.5m, so you can often survey without extending 2nd section.
It will lead to efficient works.

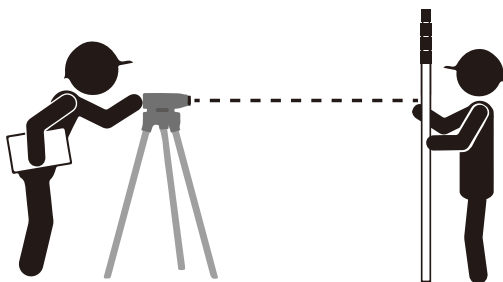

SPECIFICATIONS

Graduation (front) : Metric YW
Graduation (back) : Photo
Section : 5m / 4sec.
Full closed : 1,445mm
Weight : 1.73kg




Product Link

CHECK


LONGEST BODY

The longest staff : each section is very long and having much straightness by the long sections.
Also, it's easy to measure water level by the long body.

FULL EXTENDED



FULL CLOSED



SPECIFICATIONS

Model	ALS-74	ALS-74E
Graduation (front)	Metric YW	E
Graduation (back)	Photo	0 UP
Section	7m / 4sec.	7m / 4sec.
Full closed	2,010mm	2,010mm
Weight	3.20kg	3.20kg



Product Link

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Aluminium Staff 5m/4sec. Metric YW	STN-54	10	10	011011	TW


PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Aluminium Staff 7m/4sec. Metric YW	ALS-74	2	4	011201	TW
Aluminium Staff 7m/4sec. E face	ALS-74E	2	4	240020	TW

Prism Staff


RFC series

PRISM STAFF


The face of prism staff can be used as prism.

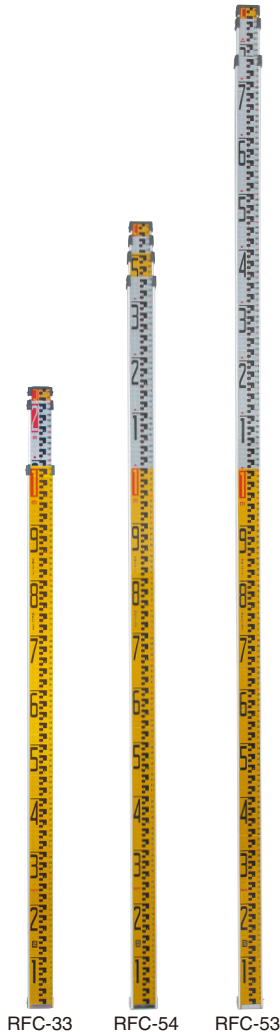

RFC-33 RFC-54 RFC-53



Dimensions
5m / 4sec.



Dimensions
5m / 3sec.
3m / 3sec.



SA-60
Circular level 60' / 2mm
(Option)
Ref. Page 079



MG-02A
Staff button
Ref. Page 078



MG-02PS
Button protection label
Ref. Page 079

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Prism Staff 5m/3sec. Metric YW	RFC-53	1	10	211101	TW
Prism Staff 5m/4sec. Metric YW	RFC-54	1	10	211102	TW
Prism Staff 3m/3sec. Metric YW	RFC-33	1	10	220871	TW

✓ CHECK


PRISM STAFF

Reflecting face of the staff can be used as prism.

No need to bring prism to field by using this "2 in 1" product.

Yellow and silver background for every single meter and easy to find out its length from far side.

Button protection sticker is also attached.

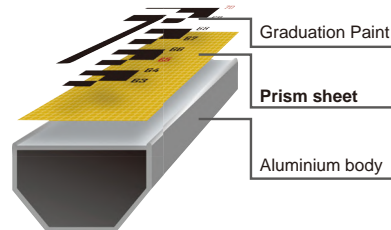

✓ CHECK

GOOD FOR FOREST SURVEYING

When sectional surveying in forest, users like to reduce extra tools, it invites the exhaustion, and results in inefficient works.

If using RFC staff, you don't need taking the prism.

Also, when using the prism, you can not often target the prism by trees or leaves in the way.

In case of RFC staff, which has wide surface, you can aim the target easily.



► SPECIFICATIONS

Model	RFC-53	RFC-54	RFC-33
Graduation (front)	Metric YW	Metric YW	Metric YW
Graduation (back)	-	-	-
Section	5m / 3sec.	5m / 4sec.	3m / 3sec.
Full closed	1,836mm	1,445mm	1,146mm
Weight	1.57kg	1.74kg	0.95kg

► STANDARD ACCESSORIES

- Carrying case
- Button protection label MG-02PS




Product Link

NEW Sliding Staff Prism ALS-P

DEDICATED TO ALUMINIUM STAFF

For topographic survey in mountainous regions.

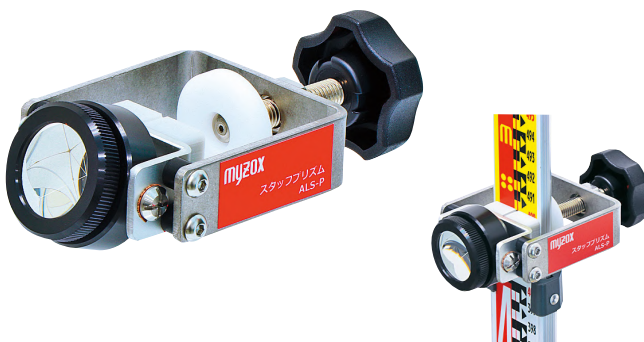


PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Sliding Staff Prism	ALS-P	1	10	222697	JP

► FEATURES

- An assist when prism staff cannot reflect the light beam because of its angle or by obstacles
- Useful for surveying in an area with a large difference in elevation

► SPECIFICATIONS

Prism size	: 1 inch (25mm)
Prism constant	: +5mm *1
Prism height	: -10mm from top of white rubber part
Tilting	: 19° (upper) / 19° (lower) *2
Staff size	: Width 30 ~ 52mm / Depth 10 ~ 28mm
Dimensions	: 83 x 120 x 37mm
Weight	: 160g



Prism height

*1 When putting the prism at the lowest available section of the staff.

*2 Depends on prism's angle, prism height will be changed.

Drain Staff

SWG-54

DRAIN STAFF

Specified design for drain use.



MG-02A
Staff button
Ref. Page 078




SWG-ADP



MG-02PS
Button protection label
Ref. Page 079



RL-60T
Circular level 60' / 2mm
Ref. Page 079




* 50cm arm is standard accessory.

SWG-54

CHECK

DRAIN STAFF

Exactly designed to measure a depth of drain. The arm part can be adjusted to fit to diameter of a manhole between 150mm to 450mm. It can be used as regular staff with adapter, SWG-ADP.



SPECIFICATIONS

Graduation (front) : Metric YW
Graduation (back) : Photo
Section : 5m / 4sec.
Full closed : 1,360mm
Weight : 2.70kg

STANDARD ACCESSORIES

- 50cm arm (SWG-ARM50)
- Extension adapter for regular use (SWG-ADP)
- Circular level (RL-60T)
- Button protection label (MG-02PS)
- Case (SWG-54-C)

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Drain Staff 5m/4sec. Metric YW	SWG-54	1	10	210101	TW
Point Arm 25cm	SWG-ARM25	1	10	217691	JP
Point Arm 50cm	SWG-ARM50	1	10	220857	TW
Extension Adapter	SWG-ADP	1	10	210407	TW
Case for SWG-54	SWG-54-C	1	10	221977	TW

Scale Staff

MTR series


SCALE STAFF

Both available to use as Telescopic and Removable section.




MTR-22

MTR-33




Front graduation
(mm)




Dimensions
(MTR-22)



Back graduation
(10/33m)
*MTR-33 only



Dimensions
(MTR-33)



Side graduation
(5mm)




MG-03
Staff button
Ref. Page 078


CHECK

SCALE STAFF


Scale staff is a simple structure, however it can be used for many situations. Suitable for measuring inside dimensions such as door and window size. Also, breaking down each section is very easy and you can use the separated section as a scale.



Depth



Width



Height

* How to measure inside dimensions

SPECIFICATIONS

Model	MTR-22	MTR-33
Graduation	Metric	Metric
Section	2m / 2sec	3m / 3sec
Full closed	1,120mm	1,140mm
Weight	0.50kg	0.80kg



Product Link

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Scale Staff 2m/2sec.	MTR-22	5	5	011036	CN
Scale Staff 3m/3sec.	MTR-33	5	5	011037	CN

Fiberglass Staff Oval Shape

GFS series

NON-CONDUCTIVE

GFS series is non-conductive staff, because of fiberglass.



GFS-1010

GFS-55




* Tip of the top section includes a 5/8x11 female threaded hole suitable for attaching a mini-prism.

CHECK

NON-CONDUCTIVE

Non-conductive fiberglass staff is suitable for workings under electric wire or railway wiring. The body is high tolerant of temperature change (-50 ~ 120 °C). Easy to hold by round shape body. Various types of length are available.



SPECIFICATIONS

Model	GFS-33	GFS-55	GFS-55E	GFS-55EB
Graduation (front)	Metric YW	Metric YW	E	EB
Graduation (back)	0 UP	0 UP	0 UP	0 UP
Section	3m / 3sec.	5m / 5sec.	5m / 5sec.	5m / 5sec.
Full closed	1,200mm	1,300mm	1,300mm	1,300mm
Weight	0.76kg	1.32kg	1.32kg	1.32kg

Model	GFS-77	GFS-77E	GFS-77EB	GFS-1010
Graduation (front)	Metric YW	E	EB	Metric W
Graduation (back)	0 UP	0 UP	0 UP	-
Section	7m / 7sec.	7m / 7sec.	7m / 7sec.	10m / 10sec.
Full closed	1,410mm	1,410mm	1,410mm	1,700mm
Weight	1.98kg	1.98kg	1.98kg	3.55kg

STANDARD ACCESSORIES

- Carrying case



Product Link

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Fiberglass Staff 3m/3sec. Metric YW	GFS-33	5	5	220414	JP
Fiberglass Staff 5m/5sec. Metric YW	GFS-55	5	5	011101	JP
Fiberglass Staff 5m/5sec. E face	GFS-55E	5	5	-	JP
Fiberglass Staff 5m/5sec. EB face	GFS-55EB	5	5	091101	JP
Fiberglass Staff 7m/7sec. Metric YW	GFS-77	5	5	011102	JP
Fiberglass Staff 7m/7sec. E face	GFS-77E	5	5	-	JP
Fiberglass Staff 7m/7sec. EB face	GFS-77EB	5	5	091102	JP
Fiberglass Staff 10m/10sec. Metric W	GFS-1010	1	10	011103	JP

Fiberglass Staff Hexagonal Shape


GFX-55EB

ECONOMICAL FIBERGLASS STAFF

GFX is economical and non-conductive.



GFX-55EB



Dimensions

CHECK

HEXAGONAL SHAPE

GFX has hexagonal shape.

When mounting the clamp, hexagonal shape creates the friction on plane, and the clamp can hold the staff tightly.



SPECIFICATIONS

Graduation(front)	: EB
Graduation(back)	: Inside
Section	: 5m / 5sec.
Full closed	: 1,314mm
Weight	: 2.8kg

STANDARD ACCESSORIES

- Carrying case

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Fiberglass Staff Hexagonal Shape EB face	GFX-55EB	10	10	221294	CN

TRIPOD 1

PRISM 2

POLE 3

STAFF 4

GNSS ACCESSORY 5

LASER SCANNING 6

SURVEYING / LASER INSTRUMENT 7

SURVEYING ACCESSORY 8

MEASURING TOOL 9

TESTING INSTRUMENT 10



Aluminium Centering Staff

SAS-1500

FOR MINI-SHIELD TUNNELING

Convenient for mini-shield construction method and for confirming the direction of excavators.



SPECIFICATIONS

Full extended : 1,500mm
Full closed : 900mm
Extend range : 300mm(one side)
Weight : approx. 800g

STANDARD ACCESSORIES

- Magnetic circular level
SASL-34
34' / 2mm



Able to be installed in 6 different positions

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Centering Staff	SAS-1500	10	10	225158	JP
Magnet Circular Level for SAS-1500	SASL-34	1	10	225159	JP

Staff Case

AS series

CARRYING AROUND

Easy to carry around by AS series.



AS01S

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Staff Case 1,330mm	AS01S	1	10	219322	TW
Staff Case 1,325mm	AS02S	1	10	011055	TW
Staff Case 2,025mm	AS03S	1	10	240019	TW
Staff Case 1,310mm	AS04S	1	10	217928	CN



CHECK

CARRYING AROUND

AS series has pocket for putting circular level, or spare button.
AS series cover all type of Myzox staff.
(AS series is an optional item.)

SPECIFICATIONS

AS01S : for MST, ALG, SUM series
AS02S : for ALM series
AS03S : for ALS series
AS04S : for ALX series

Bipod for Staves

PFS

BIPOD FOR STAVES

Specialized bipod for all staves.



BIPOD FOR STAVES

Adjustable head part holds various type of staves certainly.
The height can be adjustable by thumb release button quickly.



SPECIFICATIONS

Full extended : 1,850mm
Full closed : 1,100mm
Weight : 2.40kg
Fixturable width : 45 ~ 100mm
Material : Aluminium

STANDARD ACCESSORIES

- Carrying case



Product Link

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Bipod for Staves	PFS	4	4	218905	CN

Staff Button

MG-01 / 02A / 03 / 04

SPARE BUTTON

Spare buttons for long term use.



MG-01



MG-02A

* Protection label-compliant button.



MG-03



MG-04



CHECK

SPARE BUTTON

High durability button for staves with robust structure.
Less stress by button break. Even if button is broken, easy to replace it.
No need to buy new staff even if breaking just button.
Only take a minute to repair it.

SPECIFICATIONS

MG-01 : for ALM, SUM, ALS series
MG-02A : for MST, RFC, SWG series, ALG-25Y, ALX, AGX series
MG-03 : for MTR series
MG-04 : for ALG(except for 25Y), SUN, STN



Product Link

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Staff Button	MG-01	1	10	000016	TW
Staff Button	MG-02A	1	10	000017	TW
Staff Button	MG-03	1	10	000018	TW
Staff Button	MG-04	1	10	222050	TW

Circular Level for Staff

Circular Levels

VARIETY OF LINE UP

There must be suitable circular level for staves in Myzox's line up.



✓ CHECK

VARIETY OF LINE UP

Circular levels show if your staff is in the level or not.

Variety of line up: directly insert to staff, holding by arm and attaching by velcro tape. Also, bubble sensitivity is selectable.



Product Link

► SPECIFICATIONS

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Circular Level (60'/2mm) Standard type	SA-60	1	10	111114	CN
Circular Level (60'/2mm) Wide type	SB-60	1	10	111115	CN
Circular Level (46'/2mm)	SC-40	1	10	210100	TW
Circular Level (60'/2mm) with band	RL-60T	1	10	217353	CN
Circular Level (60'/2mm) Handheld type	RL-60	1	10	111113	CN
Circular Level (40'/2mm) with band	RL-40TS	1	10	218860	CN

Model	SA-60	SB-60	SC-40
Sensitivity	60' / 2mm	60' / 2mm	46' / 2mm
Suitable staff	ALG, SUN, STN, MST, ALX, AGX, series	ALM, SUM, ALS series	ALG, STN, MST, RFC, SWG series

Model	RL-60T	RL-60	RL-40TS
Sensitivity	60' / 2mm	60' / 2mm	40' / 2mm
Suitable staff	All Staves & Poles	All Staves	All Staves, Poles, DM Pin Poles

Button Protection Label

MG-02PS

✓ CHECK

Button protection label prevents the inflow of dust & sand into the staff.

* Use with MG-02A

► SPECIFICATIONS

Suitable staff : MST, RFC, SWG series, ALG-25Y / 35Y with MG-02A

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Button Protection Label -5pcs / sheet-	MG-02PS	1	10	218385	TW

Ground Plate

GP series



► SPECIFICATIONS

Model	STP430	C
Weight	0.43g	4.10kg

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Ground Plate (Steel)	STP430	1	10	221269	JP
Ground Plate (Ceramic)	C	1	10	210406	JP
Shoe for Ground Plate C	CP	1	10	218924	JP



Product Link

Aluminium Display Stand

MSS-03

DISPLAY STAND

Display and stockable stand.



* No products included

✓ CHECK

DISPLAY STAND

Good for display use in a shop or showroom.

Also, easy to stock many kind of staves and poles as one.

Can be attached hooks for small item.

► SPECIFICATIONS

Length : 375mm
Height : 1,610mm
Width : 295mm
Hook : 500mm x 16


PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Display Stand	MSS-03	1	1	217259	TW

Aluminium Photo Rod

N series

PHOTO RECORD

N series is the best for photo records of evidence of your working field.

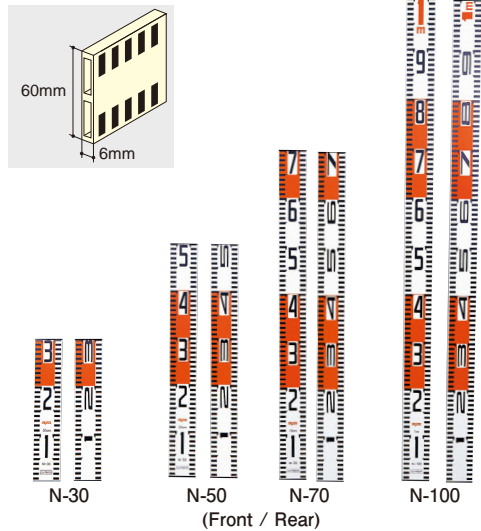


SAMPLE OF USE



POINT CLIP



PK-1



Vivid colors clip indicates the point

SPECIFICATIONS

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Aluminium Photo Rod 30cm	N-30	20	20	021012	CN
Aluminium Photo Rod 50cm	N-50	20	20	021011	CN
Aluminium Photo Rod 70cm	N-70	20	20	021010	CN
Aluminium Photo Rod 100cm	N-100	20	20	021009	CN
Aluminium Photo Rod 110cm	N-110	20	20	021013	CN
Aluminium Photo Rod 150cm	N-150	10	10	021008	CN
Aluminium Photo Rod 200cm	N-200	10	10	021014	CN
Point Clip × 4	PK-1	12	12	210813	CN

Model	N-30	N-50	N-70	N-100
Length	30cm	50cm	70cm	100cm
Weight	113g	183g	260g	360g
Material	Aluminium	Aluminium	Aluminium	Aluminium


Model	N-110	N-150	N-200
Length	110cm	150cm	200cm
Weight	407g	533g	689g
Material	Aluminium	Aluminium	Aluminium

Aluminium Photo Rod Set

NAR-5set

ALL-IN ONE

4 types of N series + K-type joint×2 in a case for NAR-5set.

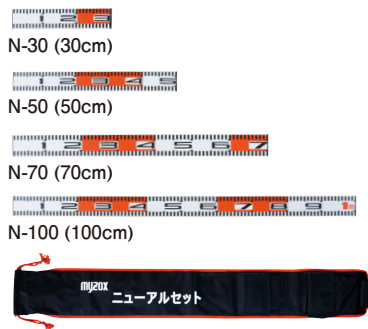

K-type joint



NAR-CAS2

SPECIFICATIONS

Photo rod
Material : Aluminium
Width : 60mm
Thickness : 6mm
Set weight : 1,248g

NAR-CAS2
Length : 1,100mm

CONTENTS

- N-30 / N-50 / N-70 / N-100 × 1
- K-type joint × 2
- Carrying case (NAR-CAS2)

CHECK

K-TYPE JOINT

For cross using / Stainless



Magnetic Joint for Photo Rod

MP series

MAGNETIC JOINT


MP series helps to attach rods to rebars.



MP-K
(with K-type joint)



MP



CHECK

MAGNETIC JOINT

Easy to attach rods to rebar by its magnet.
Suitable for photo shot to confirm interval sizes of rebars.
MP-K holds two rods and able to show cross way.

SPECIFICATIONS

Model	MP-K	MP
Weight	189g	56g
Material	Magnet & Plastic	Magnet & Plastic
Rebar size	10 ~ 25mm φ	10 ~ 25mm φ

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Aluminium Photo Rod Set	NAR-5set	10	10	021007	CN
Case for NAR-5set	NAR-CAS2	10	10	221319	CN
K-type Joint	K-type	1	10	021055	TW

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Magnetic Joint with K-type Joint	MP-K	1	10	219020	CN/TW
Magnetic Joint	MP	1	10	219021	CN



Leveling Line Stopper MIZ-ST

EASY SETTING LEVELING LINES

For pavement management.



✓ CHECK

ONE-MAN SHOOTING

By using rod stand, it is easy to take record photos with a single worker.

*Rod stand : See below.

► SPECIFICATIONS

Compatibility : Rod width 60mm
Rod thickness 6mm
Leveling line 3mmφ

Dimensions : 25 × 73 × 43mm
Weight : approx. 30g

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Leveling Line Stopper / 2pcs	MIZ-ST	12	12	224816	CN

Glow Leveling Line FCS series

CHECK LEVEL

This is used when checking the level.




► FEATURES

- Easy to see by 3mm φ & glow color
- Stretch rubber string

► SPECIFICATIONS

Model	FCS-Y	FCS-P
Size	54 × 172mm	54 × 172mm
Length	3mm φ × 30m	3mm φ × 30m
Color	Yellow	Pink


PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Glow Leveling Line Yellow	FCS-Y	10	10	214040	JP
Glow Leveling Line Pink	FCS-P	10	10	214041	JP



Rod Stand KS2 / HKS

PHOTO RECORD

Take pavement management photos with one-person operation.

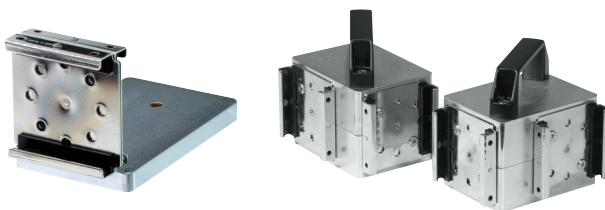

KS2


HKS (HKS-R & HKS-L)

► SPECIFICATIONS

Model	KS2	HKS
Rod size	W60mm	W60mm
Dimensions	135 × 80 × 75mm	75 × 120 × 80mm (1pc)
Weight	approx. 970g	approx. 4.6kg (1pc)

► SET CONTENTS (HKS)

- HKS-L
- HKS-R
- Anti-Slip Sticker × 2




Anti-Slip Sticker

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Rod Stand Standard type	KS2	1	10	223416	JP
Rod Stand Heavy type / Set	HKS	1	10	224433	JP
Rod Stand Heavy type / Left	HKS-L	1	10	224434	JP
Rod Stand Heavy type / Right	HKS-R	1	10	224435	JP
Anti-Slip Sticker for HKS series	HKS-S	1	10	224436	JP



✓ CHECK


EXAMPLE OF USE

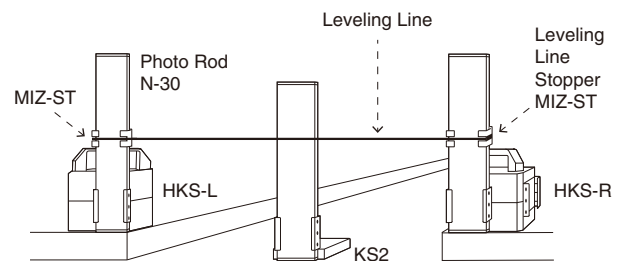

✓ CHECK


KS2

Can be used vertically or horizontally




✓ CHECK

HKS



Rod Stand

RS series



RS-A

- **SPECIFICATIONS**
Weight : 57g

- **REMARKS**
• 2pcs per pack



RS-B


- **SPECIFICATIONS**
Hole Size : 3 ~ 8mmφ
Weight : 125g



RS-C

- **SPECIFICATIONS**
Material : Plastic
Hole Size : 3 ~ 6mmφ
Weight : 45g

- **REMARKS**
• 2pcs per pack



PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Rod Stand	RS-A	1	10	210814	CN
Rod Stand	RS-B	1	10	210815	CN
Rod Stand	RS-C	1	10	217253	JP

Rebar Photo Marker

TFM series

PHOTO RECORD

For the photo record of construction process management.

✓ CHECK

In Japan, construction manager must take photos as construction process management. TFM series can be used to record the interval of rebars. Without TFM series, it's difficult to discriminate targeted rebars.



► FEATURES

- Vivid colors bring rebars into clear view.

► SPECIFICATIONS

Length : 50mm
Weight : 41g
Size : 10 ~ 30mmφ
Material : PVC



Product Link

The rib holds rebars tightly.

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Rebar Photo Marker Yellow	TFM-Y	10	100	220849	JP
Rebar Photo Marker Pink	TFM-P	10	100	220850	JP
Rebar Photo Marker White	TFM-W	10	100	220851	JP
Rebar Photo Marker Red	TFM-R	10	100	220852	JP
Rebar Photo Marker Blue	TFM-B	10	100	220853	JP
Rebar Photo Marker Green	TFM-G	10	100	220854	JP
Rebar Photo Marker Orange	TFM-O	10	100	220855	JP

Eco Tape Rod

HPR series

FAVORITE LENGTH


HPR series can be cut on your favorite length.



HPR520 (1cm)



HPR530 (1cm)



HPR753 (1cm)



HPR602T (5mm)


PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Eco Tape Rod 50mm (Color Interval 20cm)	HPR520	5	20	215568	CN
Eco Tape Rod 50mm (Color Interval 30cm)	HPR530	5	20	215888	CN
Eco Tape Rod 75mm (Color Interval 20cm)	HPR752	5	20	216557	CN
Eco Tape Rod 75mm (Color Interval 30cm)	HPR753	5	20	216558	CN
Eco Tape Rod 60mm (Color Interval 20cm)	HPR602T	5	20	216559	CN

► EXAMPLE OF USE



✓ CHECK

HPR series can be put directly on the wall, building material, or cutting board.



► FEATURES

- Resistant to water and sunlight
- Able to affix, cut, and write
- Harmful substances are not released when it is burned

► SPECIFICATIONS

Model	HPR520	HPR530	HPR752
Length	25m	25m	25m
Width	50mm	50mm	75mm
Color interval	20cm	30cm	20cm

Model	HPR753	HPR602T
Length	25m	25m
Width	75mm	60mm
Color interval	30cm	20cm (Numbering)