



# TESTING INSTRUMENT

# 10

Thermometer P.132

Thermo-Hygrometer / Condition Meter / Altimeter / Barometer P.134

Anemometer / Moisture Meter / Coating Thickness Gauge P.135

Test Hammer / Test Anvil P.136

Crack Scale P.137

Hammer / Magnifier P.138



TRIPOD	1
PRISM	2
POLE	3
STAFF	4
GNSS ACCESSORY	5
LASER SCANNING	6
SURVEYING / LASER INSTRUMENT	7
SURVEYING ACCESSORY	8
MEASURING TOOL	9
TESTING INSTRUMENT	10



## Digital Asphalt Thermometer

AST10

### FOR PAVEMENT TEMPERATURE CONTROL

Needle probe SE-IN and 9V battery are included in the set.



#### FEATURES

- Ideal for measuring asphalt with 200mm probe
- MAX / MIN, Relative measurement mode
- Data hold

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Digital Asphalt Thermometer	AST10	1	10	223318	TW
Needle Probe	SE-IN	1	10	223319	TW
Surface Probe	SE-SU	1	10	223320	TW
Wire Probe	SE-WI	1	10	223451	TW
Miniature Connector	MCCN	1	10	223452	TW

#### OPTION



Needle probe

SE-IN

Measuring range : -50 ~ 650°C

Size : 3.8φ × 200mm

Cable length : approx. 1m



Surface probe

SE-SU

Measuring range : -20 ~ 400°C

Size : 15φ × 115mm

Cable length : approx. 1m

#### SPECIFICATIONS

Display : 4 digits display

Sensor type : Type-K Thermocouple

Measuring range : -200 ~ 1,370°C

Resolution : 0.1°C (at -200 ~ 200°C)

1°C (at 201 ~ 1,370°C)

Accuracy : ±(0.5%rdg+1°C) (at 201 ~ 400°C)

±(0.3%rdg+1°C) (at other)

Power : 9V battery × 1

Dimensions : 164.1 × 53.7 × 34.3mm

Weight : approx. 178.5g (including battery)

#### SET CONTENTS

- Needle probe SE-IN
- Wire probe SE-WI(1m, -30 ~ 200°C)
- 9V battery × 1
- Manual



Product Link

## Digital Waterproof Thermometer

SK-1260

### VARIOUS SENSOR PROBES

Various sensor probes are available for wide variety of applications.



SK-1260

#### SK-S100K

Standard sensor probe

-100~300°C

φ 2.3 × 150mm



#### SK-S103K

Asphalt sensor probe with accurate tip

Stainless made

0~300°C

φ 5 × 250mm



#### SK-S106K

Asphalt sensor probe with accurate tip

Resin handle

0~300°C

φ 5 × 250mm



Measuring concrete temperature  
(SK-1260 with soft pouch)

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Thermometer	SK-1260	1	10	218850	JP
Sensor Probe -100~300°C	SK-S100K	1	10	219087	JP
Sensor Probe 0~300°C	SK-S103K	1	10	218853	JP
Sensor Probe 0~300°C	SK-S106K	1	10	218854	JP

#### FEATURES

- Measurement values can be stored into memory with a simple operation.
- Various optional probes are available for a wide variety of applications.
- A large LCD with multi-display

#### SPECIFICATIONS

Measuring range : -99.9 ~ 1,250°C

Resolution : 0.1°C at -30 ~ 199.9°C

1°C at 200 ~ 1,250°C

Accuracy : ±(0.1%rdg + 0.3)°C at 0 ~ 199.9°C

±0.5°C at -99.9 ~ -0.1°C

±(0.2%rdg + 1)°C at 200 ~ 1,250°C

Operational functions

Max : Maximum memory data

Min : Minimum memory data

Hold : Data hold

Rel : Measurement of variation

Time : Time setting

Rec / Print : Record & print (if have printer)

Alarm : Upper & lower limit

Water proof property : IPX4

Power : AAA batteries × 4 or AC adapter (option)

Battery life : 280 hours with alkaline batteries

Dimensions : W66 × H175 × D25mm

Weight : approx. 200g (Main unit with batteries)

#### STANDARD ACCESSORIES

- Soft pouch with neck strap
- AAA manganese batteries × 4
- Manual

## Thermometer for Asphalt

### AT series

#### PLATED SMALL SCALE

AT series is plated small scale of thermometer for asphalt.



AT-80



AT-100



AT-150



AT-80K



AT-100K



AT-150K

#### ► SPECIFICATIONS

Model	AT-80	AT-100	AT-150	AT-80K	AT-100K	AT-150K
Measuring range	0 ~ 200°C	0 ~ 200°C	0 ~ 200°C	0 ~ 200°C	0 ~ 200°C	0 ~ 200°C
Dimension	80mmφ	100mmφ	150mmφ	80mmφ	100mmφ	150mmφ
Color	White	White	White	Black	Black	Black
Material	Stainless (SUS304)	Stainless (SUS304)	Stainless (SUS304)	Stainless (SUS304)	Stainless (SUS304)	Stainless (SUS304)
Needle length	φ8 × 200mm	φ8 × 200mm	φ8 × 200mm	φ8 × 200mm	φ8 × 200mm	φ8 × 200mm

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Thermometer / White / 80mm φ	AT-80	1	5	082921	JP
Thermometer / White / 100mm φ	AT-100	1	5	082922	JP
Thermometer / White / 150mm φ	AT-150	1	5	082923	JP

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Thermometer / Black / 80mm φ	AT-80K	1	5	211745	JP
Thermometer / Black / 100mm φ	AT-100K	1	5	211746	JP
Thermometer / Black / 150mm φ	AT-150K	1	5	211747	JP

## Infrared Radiation Thermometer

### SK-8700 II

#### BEST SELLER

The laser marker points the target for easy measurements.



#### ► SPECIFICATIONS

Measuring range	: -20 ~ 315°C (0 ~ 599°F)
Accuracy	: ± 2°C (-20 ~ 100°C) : ± 2% (101 ~ 315°C)
Resolution	: 1°C / 1°F
Output power	: Class II laser (less than 1mW of power)
Emissivity	: 0.95
Distance to spot size	: D:S = 8:1
Storage temperature	: -20 ~ 55°C, below 90%RH (no condensation)
Power	: 9V battery × 1
Dimensions	: W41.5 × D65 × H160mm
Weight	: approx. 140g (with battery)

#### ► STANDARD ACCESSORIES

- Protection cover
- Sensor cover(hand strap)
- 9V battery
- Manual

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Infrared Radiation Thermometer	SK-8700 II	1	10	213330	CN

## Infrared Radiation Thermometer

### IR-01U

#### DOUBLE MEASUREMENT

Infrared and Air temperature can be measured at the same time.



#### ► SPECIFICATIONS

Measuring range	: -10 ~ 60°C for environment, : -30 ~ 550°C for radiation
Resolution	: 0.1°C for environment and radiation
Accuracy	: ± 0.5°C for environment, : ± 2°C (-30 ~ 100°C) for radiation : ± 2%rdg (any other) for radiation
Sampling	: 2 times / sec.
Operating temperature	: 0 ~ 50°C, below 70%RH (no condensation)
Storage temperature	: -20 ~ 60°C, below 80%RH (no condensation)
Power	: AAA battery × 2
Dimensions	: W50 × H116.6 × D20.6mm
Weight	: approx. 128g (incl. batteries & cover)

#### ► STANDARD ACCESSORIES

- Protection cover
- Strap
- Manual

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Infrared Radiation Thermometer	IR-01U	1	10	219765	TW

## Digital Thermo-Hygrometer CTH-01U

### MULTI-FUNCTION

Multi Function as thermometer and Hygrometer.



#### SPECIFICATIONS

Measuring range	: 0 ~ 60°C for temperature, 5 ~ 95%RH for humidity
Resolution	: 0.1°C for temperature, 0.1%RH for humidity
Accuracy	
Temperature	: ± 0.5°C (+10 ~ 45°C), ± 2°C (others)
Humidity	: ± 2.5%RH (10 ~ 90%RH), ± 5%RH (any other)
Operating temperature	: 0 ~ 50°C, below 70%RH (no condensation)
Storage temperature	: -20 ~ 60°C, below 80%RH (no condensation)
Power	: AAA battery × 2
Dimensions	: W50 × H115.5 × D20.6mm
Weight	: approx. 120g (incl. batteries & cover)

#### STANDARD ACCESSORIES

- Protection cover
- Strap
- Manual

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Thermo-Hygrometer	CTH-01U	1	10	219740	TW

## Multifunction Condition Meter LM-8102

### 5 IN 1 CONDITION METER

Measure the sound level, illuminance, wind speed, temperature and humidity only with this instrument.



#### FEATURES

- Sound level meter meets IEC61672 class 2
- Anemometer uses a low-friction ball bearing mounted wheel design for high accuracy
- Type K thermocouple thermometer (Probe is optional)
- Light meter uses a photo diode
- Max. and Min. hold function

#### STANDARD ACCESSORIES

- Windscreen for sound level mode
- Case
- Manual

#### SPECIFICATIONS

	Measuring range	Resolution	Accuracy
Sound level	35 ~ 130dB	0.1dB	±1.4dB(1kHz/94dB)
Illuminance	0 ~ 2,200Lux	1Lux	±0.5%rdg+8dgt
	1,800 ~ 20,000Lux	10Lux	
Wind speed	0.4 ~ 30.0m/s	0.1m/s	±3%F.S(≤20m/s)
Temperature	0 ~ 50°C	0.1°C	±1.2°C
Temperature(Thermocouple)	-100 ~ 1,300°C	0.1°C	±(1%rdg+1°C)
Humidity	10 ~ 95%RH	0.1%RH	±4%RH(<70%RH)
Data output	PS232C / USB		
Operating temperature	0 ~ 40°C, 10 ~ 85%RH		
Power	AAA batteries × 6 / DC6V (AC adapter is optional)		
Dimensions	W70 × H248 × D34mm		
Weight	approx. 340g		

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Multifunction Condition Meter	LM-8102	1	10	219222	CN

## Thermo-Hygrometer HIGHEST2

### HIGH RELIABILITY

Using human hair for detecting humidity.



#### SPECIFICATIONS

Measuring range	
Temperature	: 0 ~ 50°C
Humidity	: 20 ~ 100%RH
Resolution	
Temperature	: 0.1°C
Humidity	: 2%RH
Accuracy	
Temperature	: ± 1 (0 ~ 40°C)
Humidity	: ± 2°C (other range)
Humidity	: ± 4% (40 ~ 80%RH)
Humidity	: ± 7% (other range)
Dimensions	: 135φ × 33 mm
Power	: AA battery × 1
Weight	: approx. 230g

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Thermo-Hygrometer	7542-00	1	10	210625	JP

## Compact Altimeter FG-5102

### COMPACT & TINY ALTIMETER

Pressure tendency can forecast short term changes in the weather.



#### CHECK

##### HOLDER

You can mount on the car / wall with adhesive tape.



#### SPECIFICATIONS

Measuring range	
Altitude	: 0 ~ 4,500m
Air pressure	: 580 ~ 1,040hPa
Accuracy	: ± 20m / ± 5%
Resolution	: 50m / 5hPa
Dimensions	: H66 × W68 × D25mm
Weight	: 65g

#### STANDARD ACCESSORIES

- Holder
- Manual

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Compact Altimeter	FG-5102	1	10	221189	JP

## Barometer BAROMEX

### HANGING WALL

Big display and good for hanging on a wall.



#### FEATURES

- The index pointer enables you to see changes in atmospheric pressure.

#### SPECIFICATIONS

Measuring range	
Hectopascal	: 945 ~ 1,045hPa
Temperature	: 0 ~ 50°C
Accuracy	
Barometer	: ± 1hPa (980 ~ 1,020hPa)
Thermometer	: ± 0.1°C (0 ~ 40°C)
Dimensions	: 135φ × 33 mm
Power	: AA battery × 1
Weight	: approx. 220g

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Barometer	7612	1	10	082750	JP



## Digital Anemometer

DAM-30

### WIND SPEED AND TEMPERATURE

Simple and lightest model with selected functions.



#### ► FEATURES

- Beaufort scale & Wind chill
- Data hold
- MAX & AVERAGE data

#### ► SPECIFICATIONS

Measuring range : 1 ~ 30.0m/s, -10 ~ 50°C  
 Resolution : 0.1m/s, 0.1°C  
 Power : AAA battery × 3  
 Dimensions : W54 × H163 × D30mm  
 Weight : approx. 120g

### ✓ CHECK

#### Max Wind Speed Resistance

Wind speed rises proportionally to the altitude. There is a big gap between wind speed on the ground and in the upper air especially in a built-up area. Drone pilot must pay the most careful attention to the wind.

Standard : up to 5m/s  
 MAVIC 2 : up to 10m/s  
 MATRICE 300RTK : up to 15m/s



Product Link

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Digital Anemometer	DAM-30	1	10	222323	CN

## Anemometer & Air Flow Meter

WS-01

### 3 FUNCTIONS

WS-01 can measure wind speed, air flow and temperature.



#### ► FEATURES

- Able to measure wind speed, air flow & temperature by one instrument
- The memory can be stored up to 10 measurement values
- Auto power off function is available (can be deactivated)
- Hold function is also available
- Display a maximum & minimum measurement of wind speed & temperature
- Average temperature can be displayed

#### ► SPECIFICATIONS

Display : LCD dual display  
 Measuring function : Wind speed, air flow & temperature  
 Sensor : Vane type  
 Measuring range :  
 Wind speed : 0.5 ~ 25m/s  
 Temperature : 0 ~ 50°C  
 Resolution : 0.1m/s, 0.1°C  
 Accuracy :  
 Wind speed : ± 3%rdg or ± 0.8m/s (bigger one)  
 Temperature : ± 0.5°C  
 Operating temperature : 0 ~ 50°C, below 80%RH (no condensation)  
 Storage temperature : -10 ~ 50°C, below 75%RH (no condensation)  
 Power : AAA alkaline battery × 3  
 Dimensions :  
 Body : W85 × H168 × D38mm  
 Sensor : W77 × H168 × D33mm  
 Propeller : 65mmφ  
 Weight : approx. 323g  
 Cable length : 1m

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Anemometer & Air Flow Meter	WS-01	1	2	217273	CN

## Digital Moisture Meter

MM-01U

### MATERIAL SELECTION

Useful 7 material selection set up. (2 wood group / 5 mortar group)



Back light



Protection cover

#### ► SPECIFICATIONS

Measuring range : 8.8 ~ 54.8% (fagaceae, spruce, larch, birch, cherry, walnut)  
 7.0 ~ 47.9% (oak, pine, maple, Norway spruce)  
 0.9 ~ 22.1% (cement, concrete, concrete plaster)  
 0.0 ~ 11.0% (plaster), 0.7 ~ 8.6% (cement mortar)  
 0.6 ~ 9.9% (coal mortar), 0.1 ~ 16.5% (brick)

Operating temperature : 0 ~ 50°C, below 70%RH (no condensation)  
 Storage temperature : -20 ~ 60°C, below 80%RH (no condensation)

Power : AAA battery × 2pcs  
 Dimensions : W50 × H119 × D20.6mm  
 Weight : approx. 119g (incl. batteries & cover)

#### ► STANDARD ACCESSORIES

- Protection cover
- Strap
- Manual

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Digital Moisture Meter	MM-01U	1	2	219794	TW

## Coating Thickness Gauge

TG-01U / TG-02U

### COMPACT & RIGHT

Measure a thickness on ferrous and non-ferrous material.



Display automatically rotates for ease of use

#### ► FEATURES

- 2 types of self-calibration
- Max. / Min. alarm function
- Auto power off (30sec.)
- Back light
- Battery indicator

#### ► STANDARD ACCESSORIES

- Coating plate
- Calibration plate
- Case
- Strap
- Manual

#### ► SPECIFICATIONS

Measuring method : (ferrous) magnetic (non-ferrous) eddy-current  
 Measuring range : (ferrous) 0 ~ 2,000μm (non-ferrous) 0 ~ 1,000μm  
 Resolution : 1μm  
 Power : AAA batteries × 2  
 Dimensions : W55 × H105 × D27mm  
 Weight : approx. 85g (incl. batteries)

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Ferrous	TG-01U	1	2	220615	TW
Ferrous and Non-ferrous	TG-02U	1	2	220616	TW

## Concrete Test Hammer

D-7000

### LCD DIGITAL DISPLAY

The measuring value can be checked by LCD digital display.



#### ► FEATURES

- Able to indicate the impact number, rebound number & average value
- Able to read above numbers & value in one lot after all measurements

#### ► SPECIFICATIONS

Method	: Repulsion hardness method
Impact energy	: 2.207N.m
Measuring range	: Cylinders, 10.0 ~ 70.0N/mm <sup>2</sup>
Indication mode	: Digital indication
Anvil standard value	: 80 ± 2
Dimensions & weight	: W103 × H109 × L355mm, 1.6kg
Operating temperature	: 0 ~ 40°C (storage temp. : -20 ~ 60°C)
Power	: AA battery × 4

#### ► STANDARD ACCESSORIES

- Carborundum rubbing stone
- Batteries
- Carrying case
- Manual

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Concrete Test Hammer	D-7000	2	2	215539	JP

## Concrete Test Hammer

R-7500

### PRINTER

You don't need writing to record.



#### ► FEATURES

- Displaying the rebound number in double digital figures & angle in the LCD display
- Can be printed the testing value on the scene

#### ► SPECIFICATIONS

Method	: Repulsion hardness method
Impact energy	: 2.207N.m
Measuring range	: Cylinders, 10.0 ~ 70.0N/mm <sup>2</sup>
Indication mode	: Digital indication (Thermal printing for recording)
Anvil standard value	: 80 ± 2
Dimensions & weight	: W103 × H109 × L355mm, 1.8kg
Operating temperature	: 0 ~ 40°C (storage temperature: -20 ~ 60°C)
Power	: AA battery × 4

#### ► STANDARD ACCESSORIES

- Carborundum rubbing stone
- Batteries
- Carrying case
- Thermal recording paper
- Manual

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Concrete Test Hammer	R-7500	1	1	215538	JP

## Concrete Test Hammer

N-6500

### GRADUATION READING

Simple function, but high accurate and durability.



#### ► FEATURES

- Provided with heat-treatment, hard-chrome plating & polishing to further increase its precision & durability

#### ► SPECIFICATIONS

Method	: Repulsion hardness method
Impact energy	: 2.207N.m
Measuring range	: Cylinders, 10.0 ~ 70.0N/mm <sup>2</sup>
Indication mode	: Scale indication
Anvil standard value	: 80 ± 2
Dimensions & weight	: W55 × H55 × L355mm, 1.0kg

#### ► STANDARD ACCESSORIES

- Carborundum rubbing stone
- Carrying case
- Manual

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Concrete Test Hammer	N-6500	2	2	215442	JP

## Test Anvil

KH-80

### KEEP ACCURACY

Test Anvil is quite important to have a professional work.



#### ► FEATURES

- Able to check whether the rebound value is within "80 ± 2" & less on the spot

#### ► SPECIFICATIONS

Type	: Standard type anvil
Rebound value	: 80 ± 2
Rockwell hardness	: more than H <sub>A</sub> C 56
Dimensions	: 146φ × 228mm
Weight	: 16kg

#### ► STANDARD ACCESSORIES


- Steel case

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Test Anvil	KH-80	1	1	217204	JP

## Crack Scale CRKS series

### TAKE ONE LOOK

Simple check to know the building condition

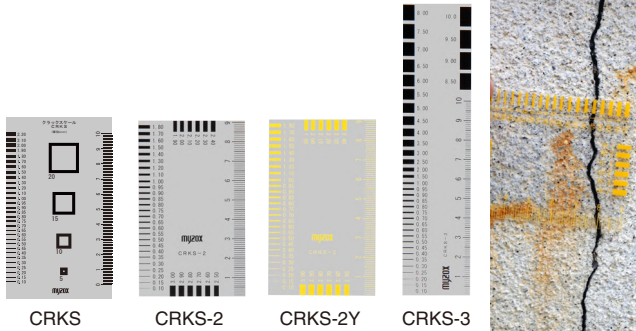

CRKS CRKS-2 CRKS-2Y CRKS-3

#### ► FEATURES

- Easy to measure a crack of concrete accurately
- Compact size
- Enable to measure up to 10mm crack (CRKS-3)

#### ► SPECIFICATIONS


MODEL	CRKS	CRKS-2	CRKS-2Y	CRKS-3
Dimensions	70 × 120mm	55 × 91mm	55 × 91mm	35 × 150mm
Measuring range	0.10 ~ 2.20	0.10 ~ 3.0	0.10 ~ 3.0	0.10 ~ 10.0
Graduation color	Black	Black	Yellow	Black

#### ► REMARKS

- Semi-transparent (CRKS)
- Transparent (CRKS-2 / CRKS-2Y / CRKS-3)

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Crack Scale	CRKS	1	20	082801	JP
Crack Scale	CRKS-2	1	20	219270	JP
Crack Scale	CRKS-2Y	1	20	219271	JP
Crack Scale	CRKS-3	1	20	219272	JP

## Crack Gauge CRACK GAUGE

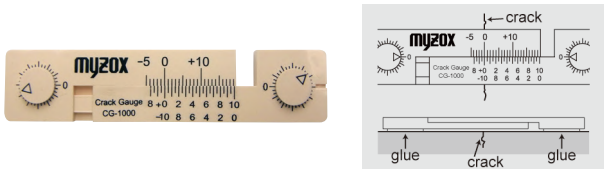

#### ► SPECIFICATIONS

- Material : Acrylic resin
- Minimum scale : Main scale 1mm, Sub scale 0.05mm
- Measuring range : -5.0 ~ 5.7mm (resolution : 0.05mm)  
-5.0 ~ 20mm (resolution : 1mm)
- Dimensions : 85 × 20 × 7mm

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Crack Gauge / 5 pcs	CG-1000	1	20	220329	KR

## Crack Disc CRACK DISC



#### ► FEATURES

- Easy measuring by glue sticking, and measure by caliper

#### ► SPECIFICATIONS


- Material : Brass
- Dimensions : 7mmφ × 1.5mm

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Crack Disc / 100 pcs	CD-100	1	10	220330	KR

## Crack Depth Scale CT-3

### FOR DEPTH

Just insert can measure the depth.

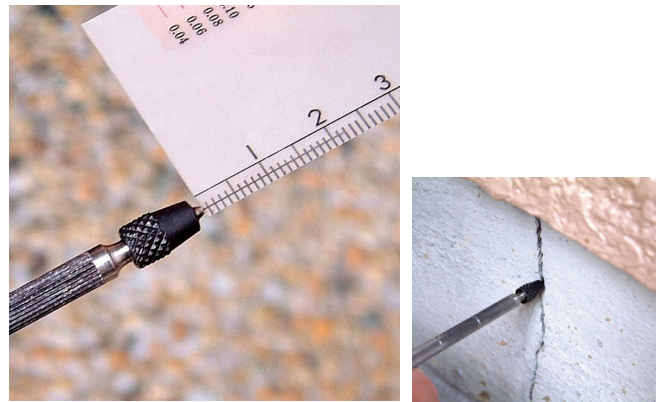

#### ► FEATURES

- Useful for measuring depth and width of crack
- Compact size

#### ► SPECIFICATIONS

- Gauge wire : 0.25φ × 200mm × 10pcs
- Crack scale : Length up to 9cm  
Width 0.04 ~ 1.4mm
- Wire holder : Screw type

#### ► REMARKS

- Crack scale & gauge set

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Crack Depth Scale	CT-3	1	20	212823	JP

## Digital Crack Meter CRACK-EYE

### RESOLUTION 0.05mm

Quick measuring can improve your efficiency.



#### ► FEATURES

- Quick to measure a crack width of concrete and metal
- Digital data display

Marking sheet

#### How to use

1. Put the Marking sheet on the crack.
2. Fit Crack-Eye in the white line of the Marking sheet and push the button. Result will be displayed.
3. Marking sheet can be also used as a crack scale.

#### ► SPECIFICATIONS

- Measuring range : 0.05 ~ 2mm
- Power : Rechargeable battery
- Dimensions : H100 × W70 × D25mm
- Weight : 105g

#### ► STANDARD ACCESSORIES

- Battery charger
- Strap
- Marking sheet
- Spare parts set


PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Digital Crack Meter	CRACK-EYE	1	10	215445	JP



## Pick Hammer / Chisel Hammer Inspection Hammer

### 3 TYPES

You can choose optimal one.

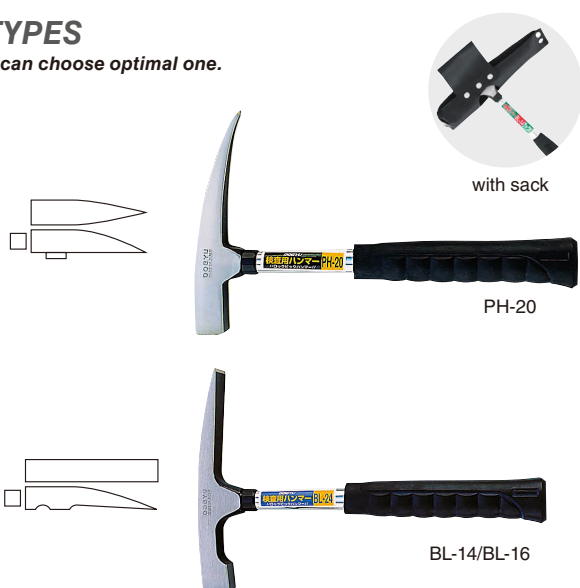

with sack

PH-20

BL-14/BL-16

#### SPECIFICATIONS

Model	PH-20	BL-14	BL-16
Overall	315mm	315mm	315mm
Head length	190mm	160mm	170mm
Hammer size	22 × 22mm	19 × 19mm	20 × 20mm
Weight	850g	580g	750g

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Pick Hammer / 190mm	PH-20	1	5	217813	JP
Chisel Hammer / 160mm	BL-14	1	5	217814	JP
Chisel Hammer / 170mm	BL-16	1	5	217815	JP

## Hand Magnifier Iwamoto Loupe

### JAPAN RELIABLE QUALITY

Once you have used Iwamoto loupe, you will not want to use any other.



LOUPE IWAMOTO 10X

LOUPE IWAMOTO 20X

#### FEATURES

- Fully corrected for spherical and chromatic errors through a three glass lens optical system.
- Chrome plated frame with leather case

#### SPECIFICATIONS

Model	LOUPE IWAMOTO 10X	LOUPE IWAMOTO 20X
Focal diameter	25mm	16mm
Focal length	22 ~ 30mm	10 ~ 12mm

PRODUCT NAME	MODEL	PKG QTY	MOQ	CODE NO.	C/O
Hand magnifier 10X	LOUPE IWAMOTO 10X	1	10	221504	JP
Hand magnifier 20X	LOUPE IWAMOTO 20X	1	10	221505	JP


## Where to Find Product Information

We distribute valuable product information through various channels and formats to ensure it benefits our dealers and users.

### PRODUCT VIDEO

Through product videos, we aim to explain complex information that may be difficult to convey through photos or catalogs in a clear and understandable manner. Please contact us if you have any request.

To access our website and view the videos, please scan the QR code.

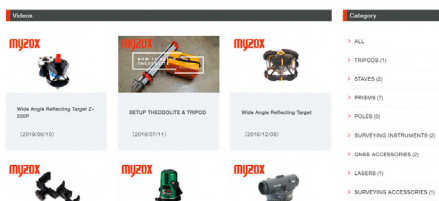

### BLOG

Our blog page delivers not only new product updates but also technical information and the latest industry trend and more. Please contact us if you have any request.

To access our website and view the blog page, please scan the QR code.

